

**Ordering Information:**

A1201WRA-S-XP - \*\*


1 2

1.Part No.

2.Material:

(blank):Ivory

BK:Black

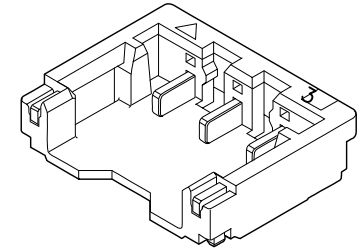

**SPECIFICATIONS:**

Current Rating: 2A AC,DC

Voltage Rating: 50V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10MΩ Max

Insulation Resistance: 100MΩ Min

Withstanding Voltage: 500V AC/minute





Pin Material: Phosphor Bronze/Gold over Nickel

Solder Tab: Phosphor Bronze/Tin over Nickel

Material: Nylon 6T ,UL94V-0(Ivory)

**Ordering Information & Dimensions**

Circuits	Dimensions(mm)			Circuits	Dimensions(mm)		
	A	B	C		A	B	C
2P	1.20	4.20	2.60	7P	7.20	10.20	8.60
3P	2.40	5.40	3.80	8P	8.40	11.40	9.80
4P	3.60	6.60	5.00	9P	9.60	12.60	11.00
5P	4.80	7.80	6.20	10P	10.80	13.80	12.20
6P	6.00	9.00	7.40				

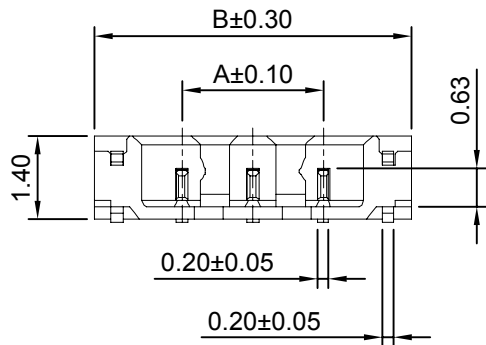

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet
mm	8:1	1 of 1
Draw BY:	Approved :	
Jack Yin	GONGYB	

Title :  
**1.20mm PITCH**  
**90° Wafer - SMT TYPE**

REV	DESCRIPTION	DATE	General Tolerance	ANGLE±
A0	NEW RELEASE	2013.04.26	x.x≤0.25 x.xx≤0.20 x.xxx≤0.15	

DRAW NO : **A1201WRA-S-XP**      REV **A0**