


RECOMMENDED PCB LAYOUT
GENERAL TOLERANCE ±0.05

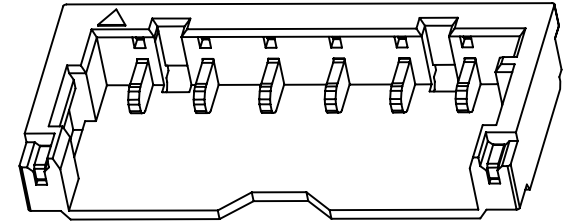

SPECIFICATIONS:

Current Rating: 2A AC,DC
 Voltage Rating: 50V AC,DC
 Temperature Range: -40°C ~ +105°C
 Contact Resistance: ≤10MΩ Max
 Insulation Resistance: 100MΩ Min
 Withstanding Voltage: 500V AC/minute
 Pin Material: Phosphor Bronze/Tin over Nickel
 Material: Nylon9T,UL 94V-0(Natural)

Ordering Information & Dimensions

Circuits	Dimensions(mm)			Circuits	Dimensions(mm)		
	A	B	C		A	B	C
2P	1.20	4.20	2.70	6P	6.00	9.00	7.50
3P	2.40	5.40	3.90	7P	7.20	10.20	8.70
4P	3.60	6.60	5.10	8P	8.40	11.40	9.90
5P	4.80	7.80	6.30				



CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet
mm	8:1	1 of 1

Draw BY:	Approved :
Moore	GONGYB

Title :
1.20mm PITCH
90° Wafer - SMT TYPE

General Tolerance	
x.x≤0.25	ANGLE±
x.xx≤0.20	
x.xxx≤0.15	

DRAW NO : A1201WRD-S-XP REV A0

A0	NEW RELEASE	2014.08.11
REV	DESCRIPTION	DATE