

Ordering Information:



A1254HA-XP - ***
1 2

1.Part No.

2.Material:

(blank): Nylon 66,UL94V-0

LCP: LCP,UL94V-0

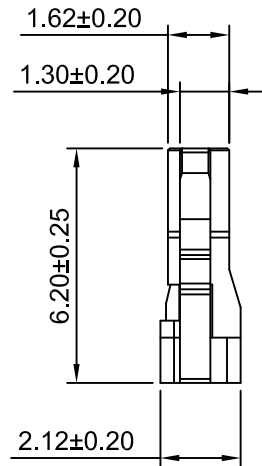

SPECIFICATIONS:

Current Rating: 1A AC,DC

Voltage Rating: 125V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 20mΩ Max.

Insulation Resistance: 100MΩ Min.

Withstanding Voltage: 500V AC/minute

Material: Nylon 66,UL94V-0(White)

Ordering Information & Dimensions

Part No.	Dimensions(mm)		
	A	B	C
A1254HA- 2P	1.25	6.10	4.10
A1254HA- 3P	2.50	7.35	5.35
A1254HA- 4P	3.75	8.60	6.60
A1254HA- 5P	5.00	9.85	7.85
A1254HA- 6P	6.25	11.10	9.10
A1254HA- 7P	7.50	12.35	10.35
A1254HA- 8P	8.75	13.60	11.60
A1254HA- 9P	10.00	14.85	12.85
A1254HA- 10P	11.25	16.10	14.10
A1254HA- 11P	12.50	17.35	15.35
A1254HA- 12P	13.75	18.60	16.60
A1254HA- 13P	15.00	19.85	17.85
A1254HA- 14P	16.25	21.10	19.10
A1254HA- 15P	17.50	22.35	20.35
A1254HA- 16P	18.75	23.60	21.60
A1254HA- 17P	20.00	24.85	22.85
A1254HA- 18P	21.25	26.10	24.10
A1254HA- 19P	22.50	27.35	25.35
A1254HA- 20P	23.75	28.60	26.60
A1254HA- 21P	25.00	29.85	27.85
A1254HA- 22P	26.25	31.10	29.10
A1254HA- 23P	27.50	32.35	30.35
A1254HA- 24P	28.75	33.60	31.60
A1254HA- 25P	30.00	34.85	32.85
A1254HA- 26P	31.25	36.10	34.10
A1254HA- 27P	32.50	37.35	35.35
A1254HA- 28P	33.75	38.60	36.60
A1254HA- 29P	35.00	39.85	37.85
A1254HA- 30P	36.25	41.10	39.10

REV	DESCRIPTION	DATE
A1	CHANGE THE DRAWING	2020.05.07
A0	NEW RELEASE	2011.05.13

CJTconn CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE
mm	5:1	1 of 1	1.25mm PITCH HOUSING ULTRA LOW PROFILE
DRN	CHK	APVD	
Dengchun Yi	DianKul Wan	Jack Yin	
General Tolerance			THIRD ANGLE PROJECTION
DRAWING NO			REV
A1254HA-XP			A1

x.xx±0.25
x.xxx±0.20
x.xxxx±0.15
ANGLES ±1°

