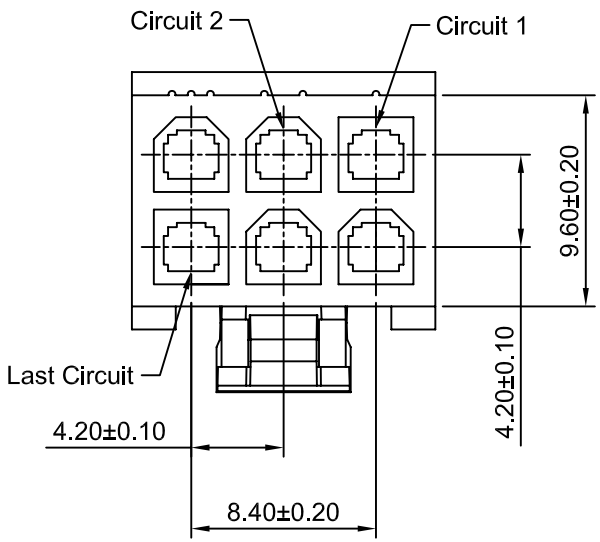

Ordering Information:

C4201HF-2x3P-B - ** - **
1 2 3

1.Part No.
2.Material:
(blank):Nylon 66 UL94V-2
V0:Nylon 66 UL94V-0
GWT:Nylon 66 UL94V-0,GWT 750°C
3.Color:
(blank):Natural
WH:White
BK:Black
RD:Red
YL:Yellow
BL:Blue

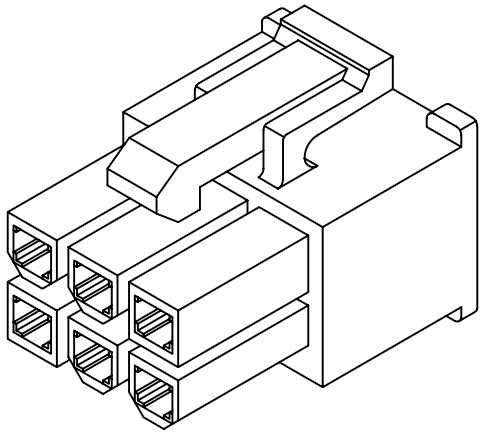

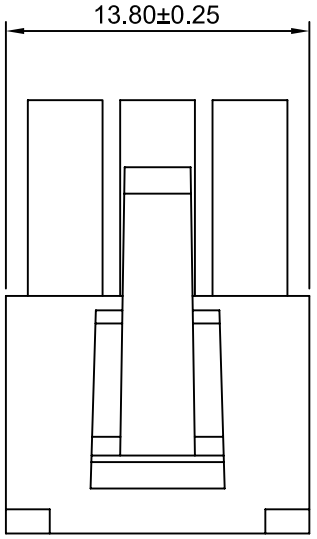

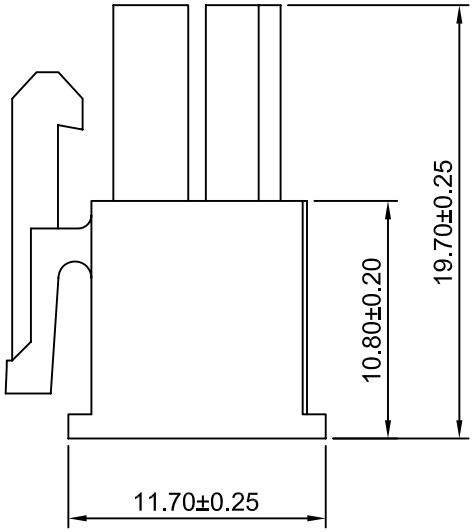

SPECIFICATIONS:
Current Rating: 9A AC,DC
Voltage Rating: 600V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 10mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1500V AC/minute
Material: Nylon 66,UL94V-2(Black)

REV	DESCRIPION	DATE
A0	NEW RELEEASE	2012.11.14

CJTconn CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet
mm	3:1	1 of 1

Draw BY: Yinzhipeng
Approved : GONGYB
General Tolerance
x.x≤0.25
x.xx≤0.20
x.xxx≤0.15
ANGLE±

Title :
4.20mm PITCH
DUAL ROW HOUSING -
SPECIAL TYPE

DRAW NO : C4201HF-2x3P-B
REV A0