

**Ordering Information:**

C4201HF-2x4P-B - \*\* - \*\*  
1 - 2 - 3

1.Part No.

2.Material:

(blank);Nylon 66 UL94V-2

V0:Nylon 66 UL94V-0

GWT:Nylon 66 UL94V-0,GWT 750°C

3.Color:

(blank);Natural


WH:White

BK:Black

RD:Red

YL:Yellow

BL:Blue

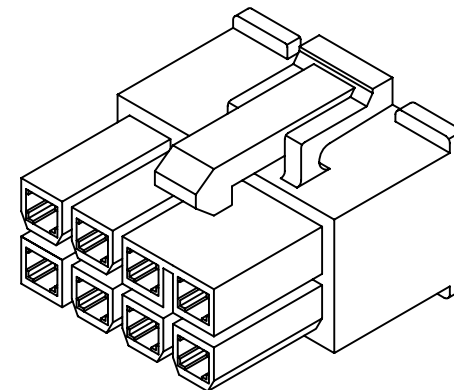

**SPECIFICATIONS:**

Current Rating: 9A AC,DC

Voltage Rating: 600V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute

Material: Nylon 66,UL94V-2(Black)

**CJTconn**

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet
mm	3:1	1 of 1

Title :

4.20mm PITCH

Draw BY:	Approved :
Yinzhipeng	GONGYB

DUAL ROW HOUSING

General Tolerance	
x.x≤0.25	ANGLE±
x.xx≤0.20	
x.xxx≤0.15	

DRAW NO : C4201HF-2x4P-B

REV  
A0

A0	NEW RELEEASE	2009.12.24
REV	DESCRIPTION	DATE