


SPECIFICATIONS:

Current Rating: 13A AC,DC
 Voltage Rating: 250V AC,DC
 Temperature Range: -40°C ~ +105°C
 Contact Resistance: 3.5mΩ Max
 Insulation Resistance: 1000MΩ Min
 Withstanding Voltage: 5000V AC/minute
 Material: Nylon 66,UL94V-2 or UL94V-0

Ordering Information & Dimensions

PART NO.	Color	Material
2P	Natural	Nylon66(V2)
2P-V0	White	Nylon66(V0)
2P-BK	Black	Nylon66(V2)
2P-GY	Gray	Nylon66(V2)
2P-VI	Violet	Nylon66(V2)
2P-GN	Green	Nylon66(V2)
2P-YL	Yellow	Nylon66(V2)
2P-OR	Orange	Nylon66(V2)
2P-BR	Brown	Nylon66(V2)

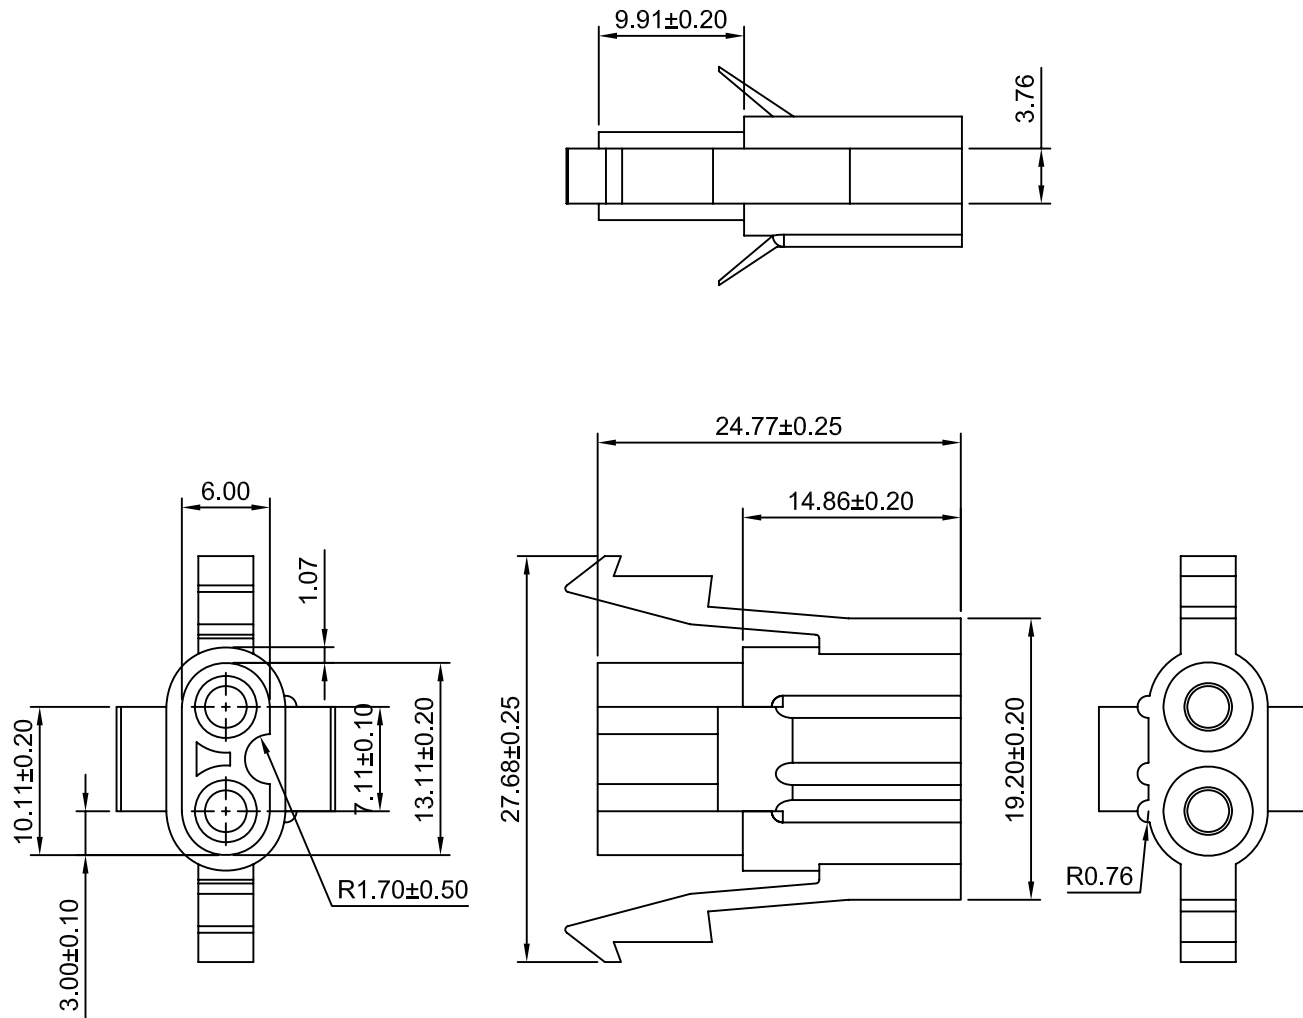

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet
mm	2:1	1 of 1

Title : 7.11mm PITCH

Draw BY:	Approved :
Yinzhipeng	GONGYB

Housing

General Tolerance

			x.xx≤0.25	ANGLE±
A0	NEW RELEESE	2009.12.28	x.xxx≤0.20	
REV	DESCRIPTION	DATE	x.xxxx≤0.15	

DRAW NO : C7110HF-2P

REV A0