


## Specifications

Current rating:13A AC,DC  
Voltage rating:250V AC,DC  
Temperature range:-40°C~+105°C  
Contact resistance:3.5mΩ Max.  
Insulation resistance:1000MΩ Min.  
Withstanding voltage:5000V AC/minute  
\*Compliant with RoHS and REACH\*  
\*Meet the HF/Halogen Free,GWT/Glow wire Test (IEC60335-1) request,need to customize\*  
\*Contact CJT for details\*

## Standards



## Assembly layout

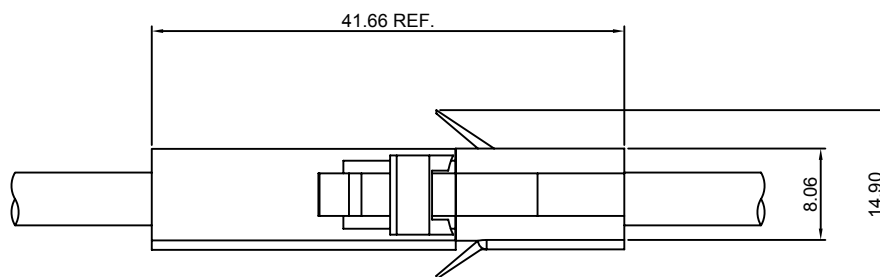

### C7110HF-2P





7.11mm pitch Housing

**Reference Informations:**

- \*Material:Nylon 66,UL94V-2
- \*Suitable CJT C5081F-T-(H) series Terminal
- \*Mates with CJT C7110HM-2P series Housing
- \*Color:Natural

**Ordering Information:**

C7110HF-2P - \*\*\*  
 1                    2  
 1.Part No.  
 2.Material:  
 (blank):Nylon 66,UL94V-2/Natural  
 V0:Nylon 66,UL94V-0/White  
 GWT:Nylon 66,UL94V-0,GWT 750°C

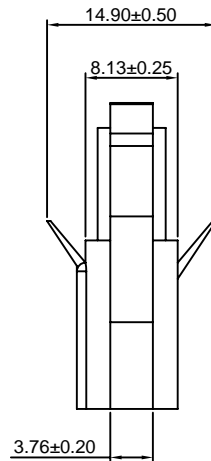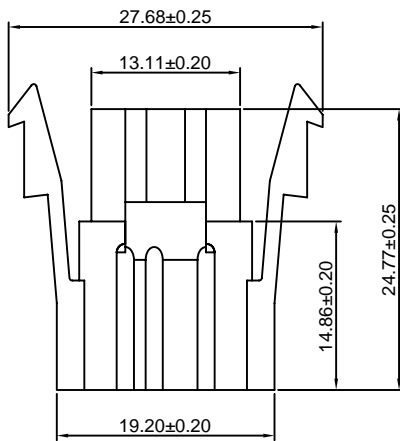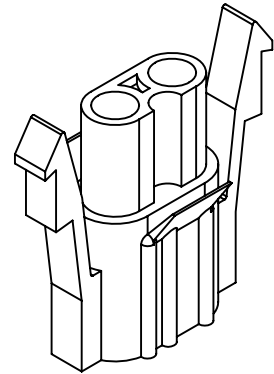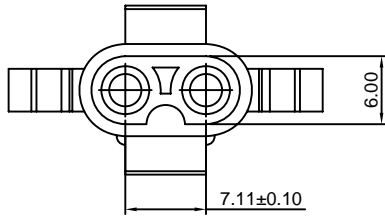

**Ordering Information & Dimensions:**

PART NO.	Color	Material
2P	Natural	Nylon 66(V2)
2P-V0	White	Nylon 66(V0)
2P-BK	Black	Nylon 66(V2)
2P-GY	Gray	Nylon 66(V2)
2P-VI	Violet	Nylon 66(V2)
2P-GN	Green	Nylon 66(V2)
2P-YL	Yellow	Nylon 66(V2)
2P-OR	Orange	Nylon 66(V2)
2P-BR	Brown	Nylon 66(V2)

Unit: mm

### C7110HM-2P





7.11mm pitch Housing

**Reference Informations:**

- \*Material:Nylon 66,UL94V-2
- \*Suitable CJT C5081M-T-(H) series Terminal
- \*Mates with CJT C7110HF-2P series Housing
- \*Color:Natural

**Ordering Information:**

C7110HM-2P - \*\*\*  
 1                    2  
 1.Part No.  
 2.Material:  
 (blank):Nylon 66,UL94V-2/Natural  
 V0:Nylon 66,UL94V-0/White  
 GWT:Nylon 66,UL94V-0,GWT 750°C

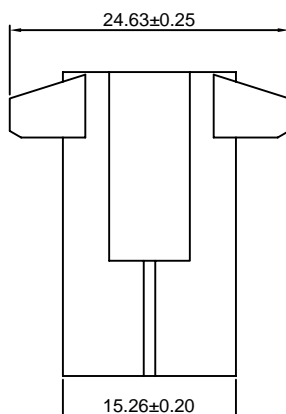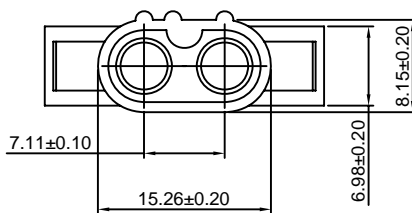

**Ordering Information & Dimensions:**

PART NO.	Color	Material
2P	Natural	Nylon 66(V2)
2P-V0	White	Nylon 66(V0)
2P-BK	Black	Nylon 66(V2)
2P-GY	Gray	Nylon 66(V2)
2P-VI	Violet	Nylon 66(V2)
2P-GN	Green	Nylon 66(V2)
2P-YL	Yellow	Nylon 66(V2)
2P-OR	Orange	Nylon 66(V2)
2P-BR	Brown	Nylon 66(V2)

Unit: mm